

Indoor Distribution Box: YTDB-96-1

Application

For fiber's splicing, distributing and protection.
Wall mount type, without adapters and connectors



Equipment characteristics

- 1) Wall-mounting application, lock design.
- 2) Housing fiber termination, storing excess fibers.
- 3) Cold rolled steel materials, with beautiful appearance.
- 4) Accommodating patching of fiber links and splicing.
- 5) Compact structure, good dustproof property.
- 6) IP55.
- 7) Product Measure : 300mm (H)*350mm (W)*125mm (D) for 100L.

Note: The nominal size may vary±10mm.

Ordering information

- 1) Indicate the number of optic fiber cable installing.
- 2) Indicate the number of optic fiber splicing.


Product Details



Bottom view




Top view

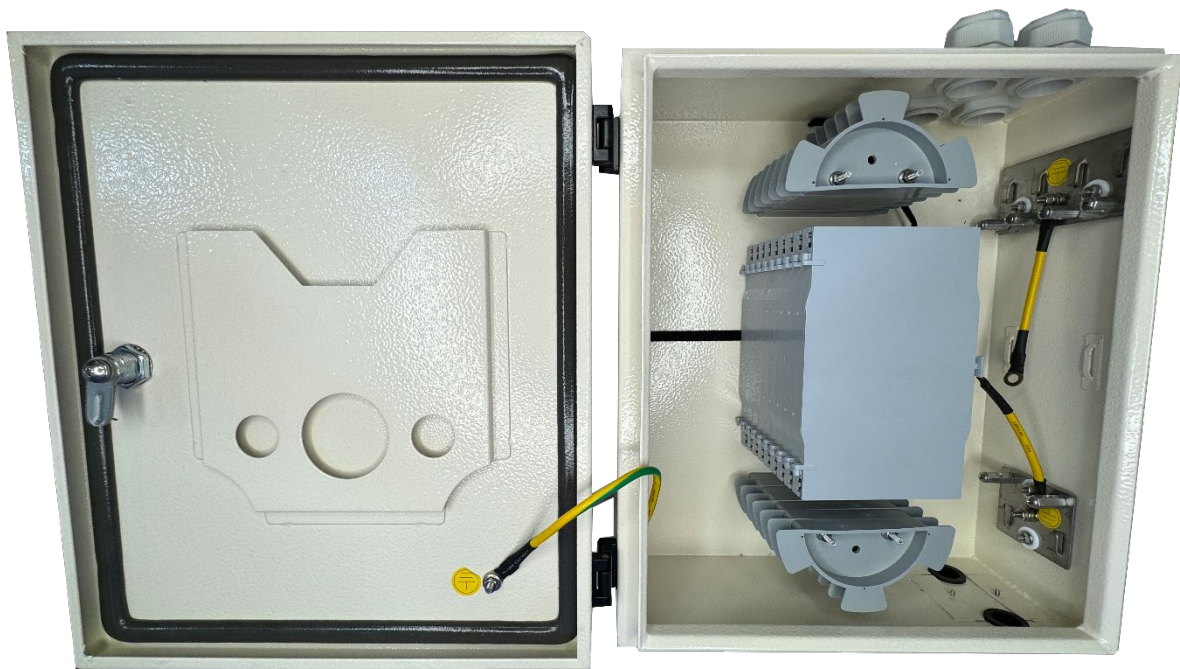








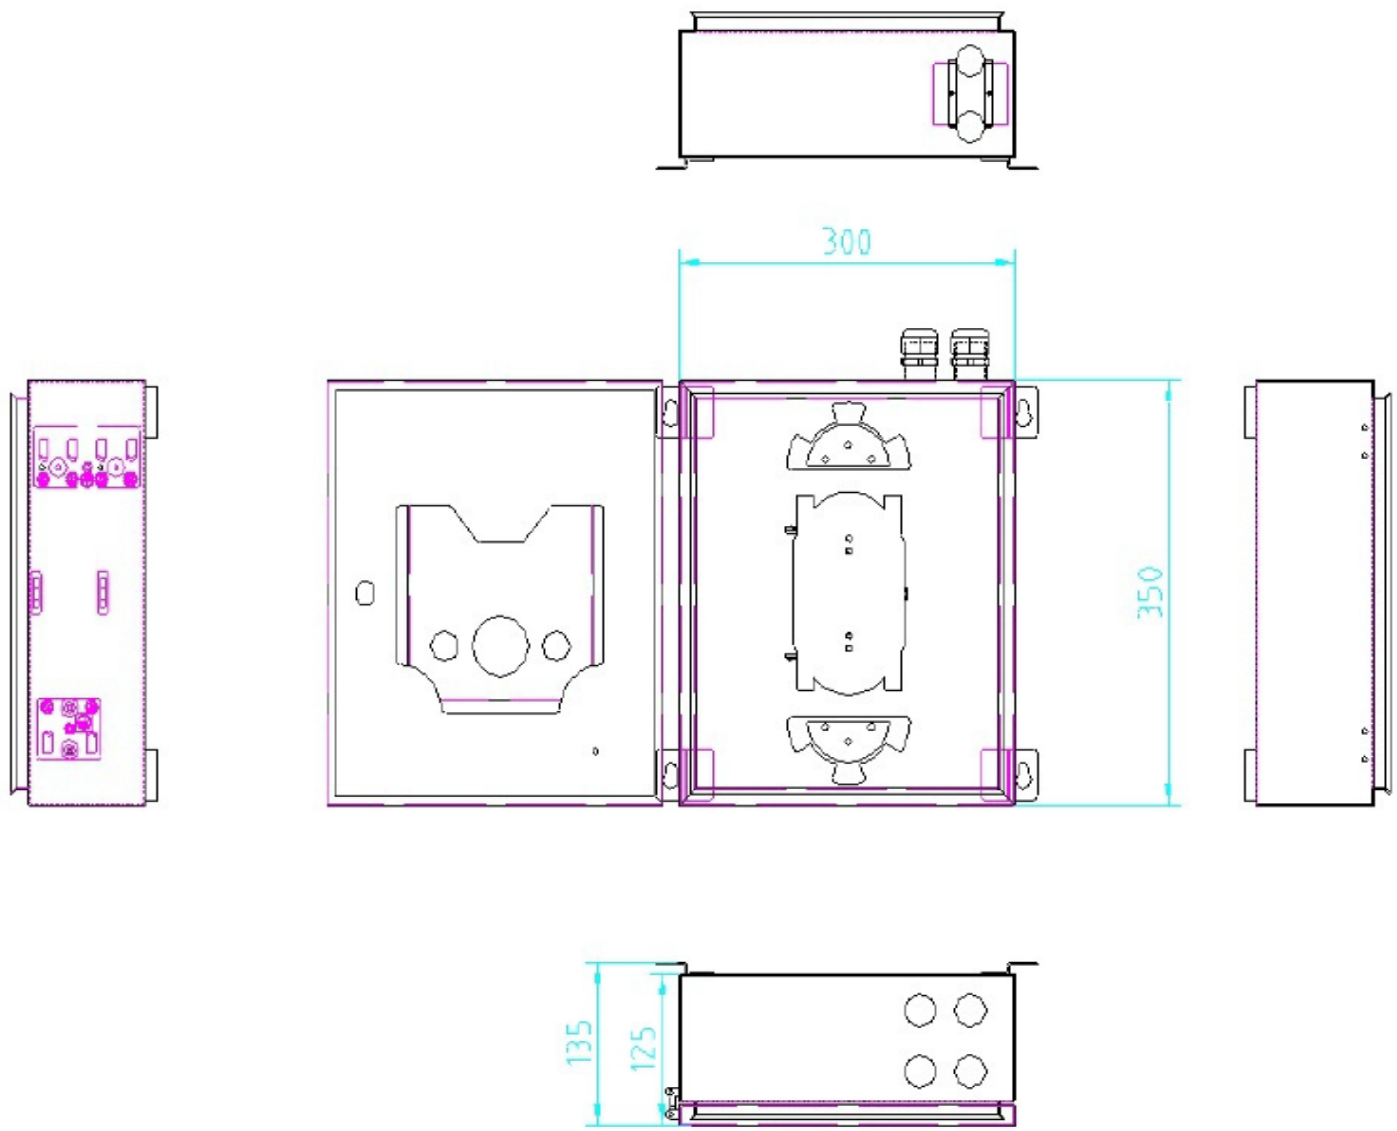

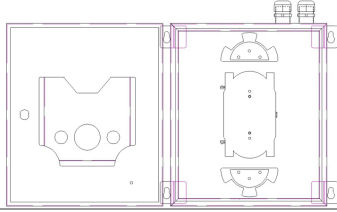

Internal view

CAD drawing



Packing List

No.	Description	Picture	Unit	Quantity
1	Body without Adapters Panel (300mm*350mm *125mm)		PCS.	1
2	Bobbin lugs		PCS.	14
3	Protection tube		m.	6
4	Grounding Wire		PCS.	4
5	12 core splice tray		PCS.	9
6	Cable gland		PCS.	10
7	Hoop (10-16mm, 201)		PCS.	4
8	Heat Shrink tube 60mm		PCS.	100
9	Ribbon		PCS.	8
10	Key lock		PCS.	1
11	Rubber ring		PCS.	2