

Model YCDH-D144-2

Overview

Model YCDH-D144-2 can connect the drop cable with feeder cable as the termination point in the FTTX network, which is cable to meet at least 16 users requirements. It can help splicing, splitting, storage and management with suitable space.

Features


- The body is made of high-quality engineering plastic with good strength
- With good waterproof design, the fiber optical splice closure can be applied into underground and aerial
- Be equipped with 4 splice trays (each capacity is 36 cores)
- Excellent fiber routing design ensures the radius curvature of the fiber well and enough fiber storage space





Technical index

Model No.	YCDH D144-2	Color	Black
Capacity	144 cores	Material	ABS+PC
External dimension (±5)	480 x 230 mm	Inlet cable port	Φ8-Φ20
Protection Level	IP68	Outlet cable port	Φ8-Φ20
Sealing Method for Inlets	Heat Shrinkable	Inlet/outlet	1 / 4

The dimension diagram:(mm)

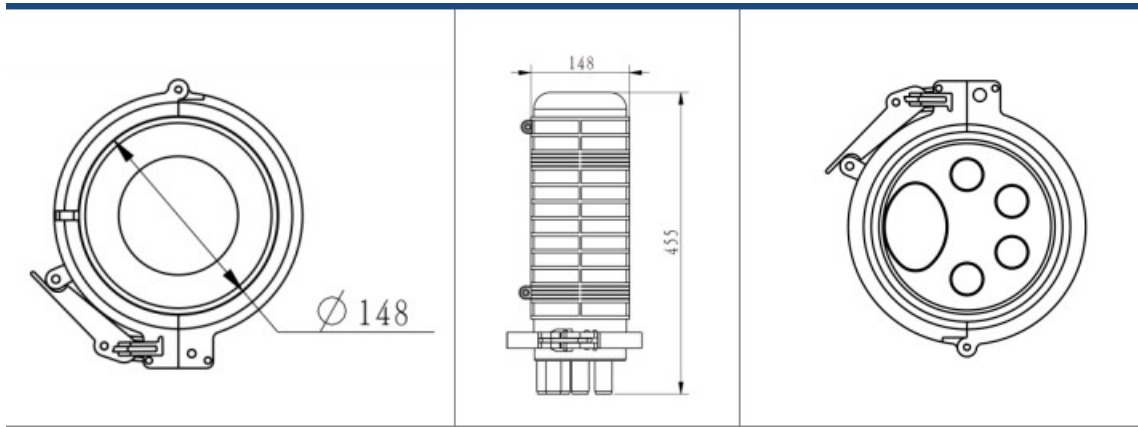

Pictures for reference:

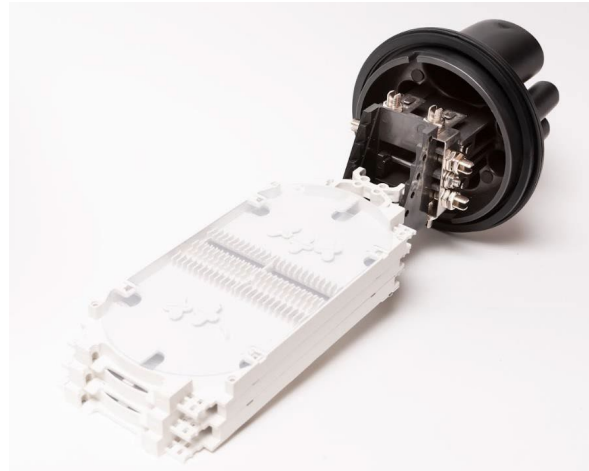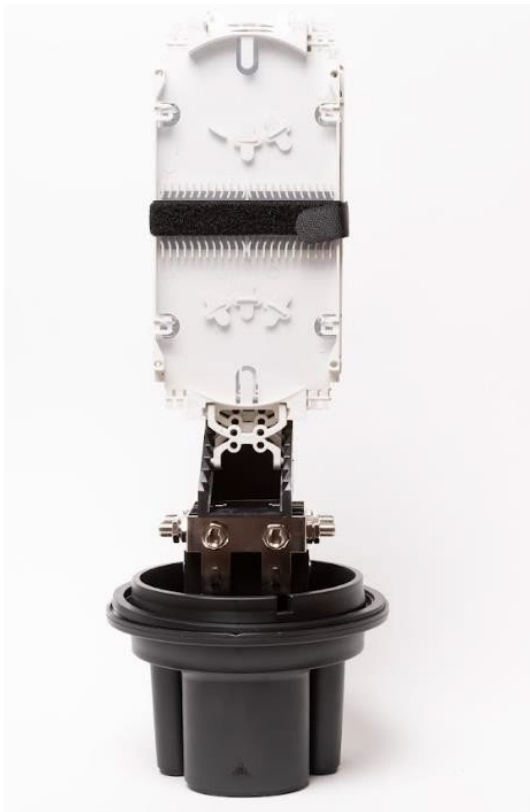

Package Information:

- Temperature : $-40^{\circ}\text{C} - +65^{\circ}\text{C}$
- Atmospheric Pressure : $70 - 106\text{kPa}$
- Product structure: Single-ended design.
- Product can accommodate micro cable with proper grommet.