


FO passive components

Optowire SC/UPC-LC/UPC Patch cord 2.0mm LSZH G657A2 Duplex

- G.657.A2 Bend Insensitive Fiber & 10mm Min. Bend Radius
- Precision Zirconia Ferrule Connectors Ensure Low Loss
- Duplex Clip Prevents the Fiber from Rotating and Maintains the Polarity
- LSZH Environmentally Friendly Jacket
- Optical Testing Ensures Network Performance
- Length – 3m, 6m, 10m, 12m, 15m or Customized

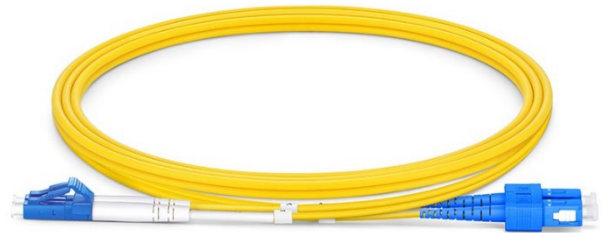

TECHNICAL SHEET

Connector A	SC/UPC	Connector B	LC/UPC
Fiber Mode	9/125 μm	Fiber Count	Duplex
Fiber Grade	G.657A2	Minimum Bend Radius	10 mm
Polish Type	UPC	Cable Diameter	2.0 mm
Cable Jacket	LSZH	Return Loss	≥ 50 dB
Wavelength	1310 nm/1550 nm	Attenuation at 1310 nm	0.36 dB/km
Insertion Loss	≤ 0.3 dB	Attenuation at 1550 nm	0.22 dB/km
Operating Temperature	-20~70°C	Storage Temperature	-40~80°C