


FO passive components

Optowire SC/APC-SC/APC Patch cord 3.0mm G657A2 LSZH simplex

- G.657.A2 Bend Insensitive Fiber & 10mm Min. Bend Radius
- Precision Zirconia Ferrule Connectors Ensure Low Loss
- LSZH Environmentally Friendly Jacket
- Optical Testing Ensures Network Performance
- Length – 2m, 3m, 6m, or Customized

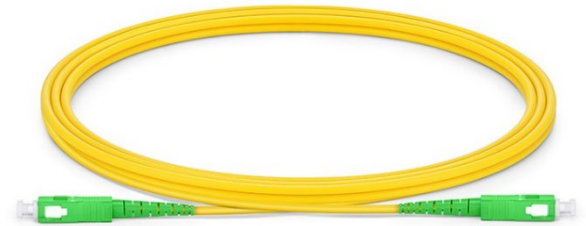

TECHNICAL SHEET

Connector A	SC/APC	Connector B	SC/APC
Fiber Mode	OS2 9/125μm	Fiber Count	Simplex
Fiber Grade	G.657.A2	Minimum Bend Radius	10mm
Polish Type	APC	Return Loss	≥ 60dB
Cable Jacket	LSZH	Cable Diameter	3.0 mm
Wavelength	1310/1550nm	Attenuation at 1310nm	0.36 dB/km
Insertion Loss	≤ 0.3 dB	Attenuation at 1550nm	0.22 dB/km
Operating Temperature	-20~70$^{\circ}$C	Storage Temperature	-40~80$^{\circ}$C