


## ***VIV-S2-R EM Wiegand Reader***

*The S2-R (EM) is a slim and durable Wiegand output proximity reader, compatible with 125KHz EM format cards. Its compact design makes it ideal for installations in narrow spaces, such as door frames or gate posts. Fully potted for protection against dust and moisture, the S2-R operates reliably in extreme temperatures, making it suitable for both indoor and outdoor use. It's a dependable solution for a variety of access control applications.*

### ***Features***

- *The reader is waterproof and conforms to the IP66 standard.*
- *It supports Wiegand output from 26 to 37 bits, with 26 bits as the default.*
- *It is compatible with 125KHz EM cards.*
- *The operating temperature range is from -40°C to 60°C (-40°F to 140°F).*
- *The reading range is up to 7 centimeters.*



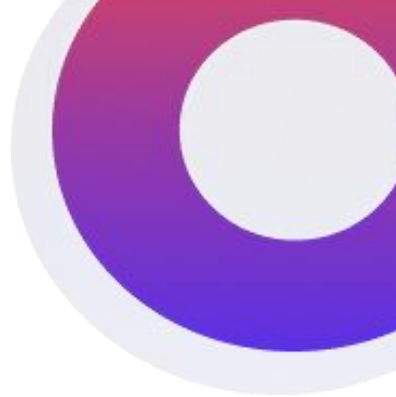

## Specifications

<i>Operating Voltage</i>	<i>9 ~ 18V DC</i>
<i>Standby Current</i>	<i>&lt; 25 mA</i>
<i>Frequency</i>	<i>125KHz</i>
<i>Card Type</i>	<i>EM Card</i>
<i>Reading Distance</i>	<i>7 cm</i>
<i>Output Format</i>	<i>Wiegand 26 bits (26~37 bits available upon request)</i>
<i>Operating Temperature</i>	<i>-40°C ~ 60°C (-40°F ~ 140°F)</i>
<i>Operating Humidity</i>	<i>10%RH ~ 95%RH</i>
<i>Index Of Perfection</i>	<i>IP66</i>
<i>Dimensions</i>	<i>L103 x W43 x H19 (mm)</i>

## Product Size

