


VIV-S5-EM Metal Standalone EM Reader Access

The VIV-S5-EM is a compact, waterproof stand-alone programmable access control system that offers secure proximity entry. Designed for ease of use, it features a simple, intuitive interface for quick setup and operation. Its rugged construction ensures reliable performance in both indoor and outdoor environments. With high reliability and minimal maintenance, the S5-EM is an efficient solution for a wide range of access control applications.

Features

- *Metal case, anti-vandal*
- *Waterproof, conforms to IP66*
- *One relay, 2000 users, standalone*
- *Card type: 125KHz EM card*
- *Working temperature: -40°C ~ 60°C (-40°F ~ 140°F)*
- *Pulse mode, toggle mode*
- *Built in LDR for anti tamper*
- *Card block enrolment*



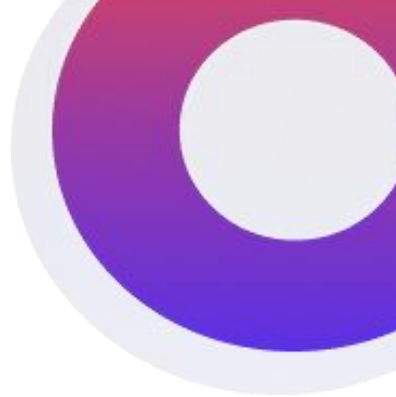

Specifications

<i>User Capacity</i>	<i>User Capacity</i>	2000
	<i>Card</i>	EM Card
<i>Operating Voltage</i>	<i>Operating Voltage</i>	9~18V AC/DC
	<i>Idle Current</i>	< 40mA
<i>Proximity Card Reader</i>	<i>Proximity Card Reader</i>	EM
	<i>Radio Technology</i>	125KHz Proximity Card
	<i>Read Range</i>	3~10 cm
<i>Wiring Connections</i>	<i>Relay output, exit button</i>	
<i>Relay</i>	<i>Relay</i>	One (NO, NC, Common)
	<i>Adjustable Relay Output Time</i>	0~99 Seconds (5 seconds default)
	<i>Lock Output Load</i>	2Amp Maximum
<i>Environment</i>	<i>Environment</i>	Meets IP66
	<i>Operating Temperature</i>	-40°C~60°C(-40°F~140°F)
	<i>Operating Humidity</i>	20%RH~98%RH
<i>Physical</i>	<i>Physical</i>	Zinc-Alloy
	<i>Surface Finish</i>	Power Coat
	<i>Dimensions</i>	10.3L x 4.8W x 1.9H (cm)
	<i>Unit weight</i>	260g

Product Size

