

# S3900 SERIES



Supports Maximum 48 Gigabit Ports and 6 10GE SFP+ Uplink Ports



Advanced Hardware Architecture and Industry-leading Port Density



Carrier-Level High Reliability Layer-3 Routing Functions



Varied Service Characteristics Versatile IPv6 Solution Complete Security Mechanism

## Product Overview

S3900 Series is a next-generation of aggregation 10GE switch introduced by VIVIO. It is targeted at the IP MAN (metropolitan area network), government and enterprise networks, Internet cafe and diskless working environment. It is developed on the basis of high performance hardware and BDROS software platform with VIVIO own independent intellectual property rights. It supports functions such as powerful ACL, flexible QinQ, 1:1 or N:1 VLAN switching, Ethernet OAM, carrier-level QoS and industry-level 10GE Ether-ring, ensuring this switch series meets application requirements in all kinds of complicated sites. It also supports layer-3 routing protocol.

VIVIO S3900 Series has 5 models: S3900-24T6X, S3900-24S8T6X, S3900-48T6X, S3900-48M6X and S3900-48S6X. It supports up to 48 gigabit ports and 6 10GE ports.

## Innovative Virtual Cluster Switching Technique

**BVSS (VIVIO Virtual Switch System):**

BVSS makes full use of each link in the physical devices, which avoids STP blocking the link and protects the original link to the maximum extent.

**Improved Performance:**

virtualize multiple physical devices into one. The performance, reliability and management of the virtual system are superior to the physical ones.

**High Reliability:**

Based on the advanced distribution mechanism and efficient cross-physical link aggregation link function, the logic control plane, service control plane and service data plane are separated. Thus, the device can support continuous layer-3 routing forwarding, avoiding service interruption as a result of a single point of failure

**Easy Management:**

BVSS realizes single IP management, greatly improving the networking efficiency and lowering the operating cost.

VIVIO S3900 Series

## Product Characteristics

### Carrier-Level QoS Policies

Supports priority retagging and complicated flow classification based on VLAN, MAC, source address, destination address, IP or priority to better streamline carrier's services. Supports flexible bandwidth control policies and supports port-/ flow-based flow limit, and ensuring the line speed forwarding of each port to make sure the high quality of video, audio and data services. Supports 8 priority queues by each port. Supports multiple queue schedule algorithms such as SP, WRR, and SP+WRR.

### Varied Service Characteristics

Supports layer-2 and layer-3 multicast routing protocol, which enable the device can access to IPTV, HD video surveillance and HD video conference. Supports layer-3 routing protocol and super-large routing table capacity, which enables the device is available in large campus networks, enterprise networks and industry networks

### Versatile IPv6 Solution

Supports the IPv6 protocol suite, IPv6 neighbor discovery, ICMPv6, path MTU discovery, DHCPv6, etc. Supports Ping, Traceroute, Telnet, SSH, ACL. Supports MLD, MLD Snooping, IPv6 static routing, RIPng, OSPFv3 and BGP4+, etc. Supports IPv6 tunnel: manual tunnel, automatic tunnel, GRE tunnel, 6to4, ISATAP Supports IPv4 transits to IPv6: IPv6 manual tunnel, automatic tunnel, 6 to 4 tunnel, ISATAP tunnel.

### Industrial Ethernet Ring with Zero Delay and Zero Packet Loss

Supports industry-level EAPS and ERPS, and their protection recovery time is less than 50ms. Their high reliability is represented by the null packet loss, which has been proved by many years of application in the Grid, rail transportation and defense systems.

### Complete Security Mechanism

**Equipment-Level Security:** The advanced hardware infrastructure design realizes the level-based packet schedule and packet protection, prevents DoS-/TCP-related SYN Flood, UDP Flood, Broadcast Storm or large traffic attacks, and supports level-based command line protection, endowing different levels of users with different management permissions. **Security Authentication Mechanism:** IEEE 802.1x, Radius and BDTacacs+Enhanced **Service Security Mechanism:** supports the plaintext or MD5 authentication of relevant routing protocol, URPF, deep inspection of hardware packet, control packet and data packet and filtering technology.

### Innovative Energy-Saving Design

**Intelligent power management:** The power system of S3900 series supports real-time monitoring the device and the slow-start. It is also power-saving. **Intelligent fan management system:** The fan system of S3900 Series supports automatic speed regulation, which efficiently slow the fan speed and mitigate the noise. Complies with the international standard IEEE 802.3a

### Flexible and Convenient Management and Maintenance

Supports management modes such as the console port, Telnet, SSH, etc. Supports the WEB management mode, which is easy and efficient so that it makes installation and debugging convenient. Supports TFTP-patterned file upload/download management.

Supports ISSU (In-Service Software Upgrade). Supports SNMP and VIVIO NMS smart network management platform to realize automatic equipment discovery, network topology management, equipment configuration management, performance data statistics and analysis and trouble management.

## Model Lists

### S3900-24T6X



- 24-Port Gigabit RJ45
- 6-Port 10G/GE SFP+

### S3900-24S8T6X



- 24-Port Gigabit SFP
- 8-Port Gigabit RJ45
- 6-Port 10G/GE SFP+

### S3900-48T6X



- 48-Port Gigabit RJ45
- 6-Port 10G/GE SFP+

### S3900-48M6X




- 24-Port Gigabit SFP
- 24-Port Gigabit RJ45
- 6-Port 10G/GE SFP+

### S3900-48S6X



- 48-Port Gigabit SFP
- 6-Port 10G/GE SFP+

## Application Diagram

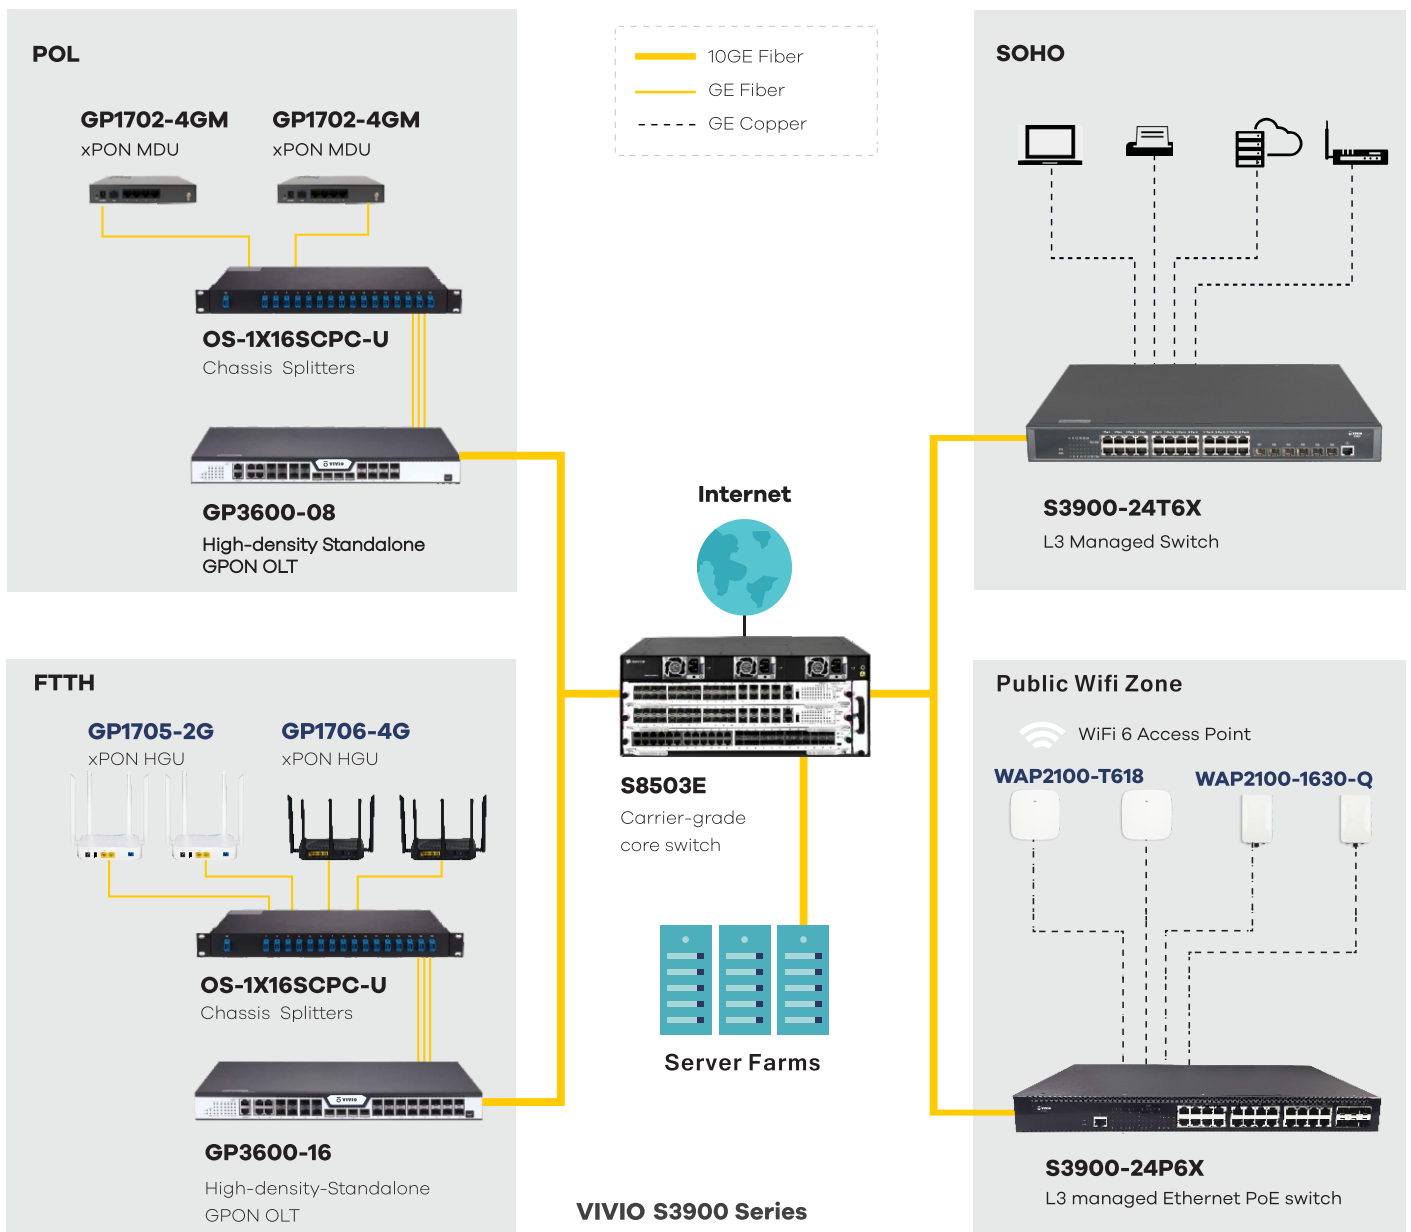

## Product Specifications

Item		S3900-24T6X	S3900-24S8T6X	S3900-48T6X	S3900-48M6X	S3900-48S6X
Gigabit Interface	RJ45	24	8	48	24	/
	SFP	/	24	/	24	48
10G/GE Interface		6	6	6	6	6
Console (RJ45)		1	1	1	1	1
Backplane (Gbps)		216	216	216	216	216
Forwarding rate (Mpps)		126	138	162	162	162
<b>Physical Specifications</b>						
Chassis	Dimensions (WxDxH)(mm)	440x350x44	440x350x44	440x350x44	440x350x44	440x350x44
Package	Dimensions (WxDxH)(mm)	576x448x94	576x448x94	576x448x94	576x448x94	576x448x94
<b>Power</b>						
Power supply (hot-swap)	AC: 100V-240V 50Hz±10%	75W	75W	75W	75W	150W
Total output BTU (1000BTU/H=293W)		255.97	255.97	255.97	255.97	511.94
Noise@25°C (dBA)		45	45	45	45	45
MTBF(H)		>200,000	>200,000	>200,000	>200,000	>200,000
Forwarding mode		Store-forward	Store-forward	Store-forward	Store-forward	Store-forward
Flash (MB)		16	16	16	16	16
DRAM (MB)		512	512	512	512	512
MAC		32K	32K	32K	32K	32K
Buffer size(MB)		2	2	2	2	2
Jumbo frame		9K	9K	9K	9K	9K
Routing table	IPv4	12K	12K	12K	12K	12K
	IPv6	4K	4K	4K	4K	4K
ARP table	IPv4	8K	8K	8K	8K	8K
	IPv6	2K	2K	2K	2K	2K
Total SVI		1K	1K	1K	1K	1K

## Features

### VLAN

- 4K Active VLAN,
- QinQ & Selective QinQ,
- GVRP,
- Voice VLAN

### Spanning Tree

- 802.1D (STP),
- 802.1W (RSTP) and 802.1S (MSTP) BPDU guard,
- root guard and loopback guard

### Multicast

- PIM-SM, PIM-DM, IGMP v1/v2/v3,
- IGMP Snooping, IGMP Fast Leave,
- MVR, IGMP filter

### IPv4

- Static routing, RIP v1/v2, OSPF, BGP, PBR, ECMP
- BFD for OSPF, BGP

### DHCP

- DHCP server/relay/client
- DHCP snooping/option82

### MCE

- Multi-VRF

### IPv6

- ICMPv6, DHCPv6, ACLv6 and IPv6 Telnet
- IPv6 neighbor discovery, Path MTU discovery
- MLD V1/V2, MLD snooping
- IPv6 Static Routing, RIPng, OSPFv3, BGP4+
- Manual tunnel, ISATAP tunnel, 6 to 4 tunnel

### QoS

- CAR, HQoS, MAC/IP/TCP/UDP/VLAN/COS/DSCP/TOS based QoS, 802.1P/DSCP priority re-labeling, SP, WRR, and "SP+WRR", Tail-Drop, WRED, flow monitoring and traffic shaping

### Security

- Port isolation, Port security, and "IP+MAC+port" binding, MAC sticky
- DHCP Snooping and option 82, DAI & IP source guard, PPPoE+,
- IEEE 802.1x, Radius and BDTacacs+
- L2/L3/L4 ACL flow identification and filtration Anti-attack from DDoS, TCP's SYN Flood, UDP Flood, etc. Broadcast/multicast/unknown unicast storm-control
- MD5, SHA-256, RSA-1024, AES256, etc.

### Reliability

- Static/LACP link aggregation, Interface backup
- BVSS virtual-stacking
- EAPS and ERPS
- URPF, LLDP
- ISSU
- VRRP
- 1+1 power backup

### Management

- Console, Telnet, SSH v1/2, HTTP, HTTPS,SNMP v1/v2/v3, RMON
- TFTP, FTP, SFTP
- NTP, SPAN, RSPAN
- sFlow
- Syslog

### Accessories

- Power cord, rackmount kits, console cable

### Environment

- Operating temperature/humidity: 0 C -50 C , 10%-90% non-condensing
- Storage temperature/humidity: -20 C -70 C , 5%-95% non-condensing

### Certification

- CE, FCC, ROHS

## Ordering Information

Item	Description
<b>S3900 Series switch</b>	
S3900-24T6X	24-Port Gigabit RJ45 + 6-Port 10G SFP+ L3 Stackable Managed Switch (2 power slots, single hot-swap AC-220V power supply, with cooling fan, 1U, 19-inch rack-mounted installation)
S3900-24S8T6X	24-Port Gigabit SFP + 8-Port Gigabit RJ45 + 6-Port 10G SFP+ L3 Stackable Managed Switch (2 power slots, single hot-swap AC-220V power supply, with cooling fan, 1U, 19-inch rack-mounted installation)
S3900-48T6X	48-Port Gigabit RJ45 + 6-Port 10G SFP+ L3 Stackable Managed Switch (2 power slots, single hot-swap AC-220V power supply, with cooling fan, 1U, 19-inch rack-mounted installation)
S3900-48M6X	24-Port Gigabit RJ45 + 24-Port Gigabit SFP + 6-Port 10G SFP+ L3 Stackable Managed Switch (2 power slots, single hot-swap AC-220V power supply, with cooling fan, 1U, 19-inch rack-mounted installation)
S3900-48S6X	48-Port Gigabit SFP + 6-Port 10G SFP+ L3 Stackable Managed Switch ( 2 power slots, single AC-220V hot-swap power supply, with cooling fan, 1U, standard 19 inch rack-mounted installation)
<b>Optical modules</b>	
<b>10GE optical modules</b>	
SFP+TX	10GE SFP+-to-RJ45 module
SFP+SX	10GE SFP+ multi-mode (300m, 850nm, LC)
SFP+LX-10	10GE SFP+ single-mode (10Km, 1310nm, LC, DDM)
SFP+LX-20	10GE SFP+ single-mode (20Km, 1310nm, LC, DDM)
SFP+LX-40	10GE SFP+ single-mode (40Km, 1310nm, LC, DDM)
SFP+LX-80	10GE SFP+ single-mode (80Km, 1550nm, LC, DDM)
SFP+LX-SM-1270-10	10GE SFP+ single-mode, single-fiber (10Km, TX1270/RX1330, LC, DDM)
SFP+LX-SM-1330-10	10GE SFP+ single-mode, single-fiber (10Km, TX1330/RX1270, LC, DDM)
SFP+LX-SM-1270-20	10GE SFP+ single-mode, single-fiber (20Km, TX1270/RX1330, LC, DDM)
SFP+LX-SM-1330-20	10GE SFP+ single-mode, single-fiber (20Km, TX1330/RX1270, LC, DDM)
SFP+LX-SM-1270-40	10GE SFP+ single-mode, single-fiber (40Km, TX1270/RX1330, LC, DDM)
SFP+LX-SM-1330-40	10GE SFP+ single-mode, single-fiber (40Km, TX1330/RX1270, LC, DDM)
<b>GE Optical Modules</b>	
GSFP-TX-B	10GE SFP+-to-RJ45 module
GSFP-SX-D	GE SFP multi-mode (500m, 850nm, LC, DDM)
GSFP-LX-10-D	GE SFP single-mode (10Km, 1310nm, LC, DDM)
GSFP-LX-20-D	GE SFP single-mode (40Km, 1310nm, LC, DDM)
GSFP-LX-40-D	GE SFP single-mode (40Km, 1310nm, LC, DDM)
GSFP-ZX-80-D	GE SFP single-mode (80Km, 1550nm, LC, DDM)
GSFP-ZX-120-D	GE SFP single-mode (120Km, 1550nm, LC, DDM)
GSFP-LX-SM1310-10-BIDI	GE SFP single-mode, single fiber (10Km, TX1310/RX1550, LC, DDM)
GSFP-LX-SM1550-10-BIDI	GE SFP single-mode, single fiber (10Km, TX1550/RX1310, LC, DDM)
GSFP-LX-SM1310-20-BIDI	GE SFP single-mode, single fiber (20Km, TX1310/RX1550, LC, DDM)
GSFP-LX-SM1550-20-BIDI	GE SFP single-mode, single fiber (20Km, TX1550/RX1310, LC, DDM)