


VIV-E2 Embedded RFID Access

The VIV-E2 is a standalone RFID access control unit with a durable metal housing and a compact embedded design. It supports both Wiegand input and output, allowing it to function either as a standalone access controller or as a Wiegand reader connected to an external system. Its robust construction and flexible configuration options make it suitable for a wide range of secure access applications.

Features

- *Metal case, embedded design*
- *Waterproof, conforms to IP66*
- *Card type: 125KHz EM card or 13.56MHz Mifare card for optional*
- *Working temperature: -40 °C ~ 60 °C*
- *Pulse mode, toggle mode*
- *Built in LDR for anti tamper*
- *Card block enrollment*
- *Wiegand 26 bits output*
- *Wiegand 26/34 bits input automatic identification*



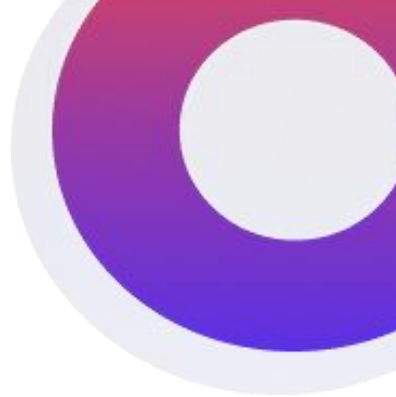

Specifications

<i>User Capacity</i>	<i>User Capacity</i>	<i>1000</i>
	<i>Card</i>	<i>EM Card/Mifare Card</i>
<i>Operating Voltage</i>	<i>Operating Voltage</i>	<i>12~18 V DC</i>
	<i>Idle Current</i>	<i>< 50mA</i>
<i>Proximity Card Reader</i>	<i>Proximity Card Reader</i>	<i>EM/Mifare</i>
	<i>Radio Technology</i>	<i>125KHz/13.56MHz</i>
	<i>Read Range</i>	<i>0~6cm</i>
<i>Wiring Connections</i>	<i>Relay output, exit button, wiegand(in&out)</i>	
	<i>Relay</i>	<i>One (NO, NC, Common)</i>
<i>Relay</i>	<i>Adjustable Relay Output Time</i>	<i>0-99 Seconds (5 seconds default)</i>
	<i>Lock Output Load</i>	<i>2 Amp Maximum</i>
	<i>Environment</i>	<i>Meets IP66</i>
<i>Environment</i>	<i>Operating Temperature</i>	<i>-40°C ~ 60°C (-40°F ~ 140°F)</i>
	<i>Operating Humidity</i>	<i>20% RH ~ 98% RH</i>
<i>Physical</i>	<i>Physical</i>	<i>Stainless Steel Plate</i>
	<i>Color</i>	<i>Silver & Black</i>
	<i>Dimensions</i>	<i>115x70x25mm</i>
	<i>Unit Weight</i>	<i>230g</i>

Product Size

