


FO passive components

Optowire OM3 LC/UPC-LC/UPC Patch cord 2.0mm LSZH simplex

- Bend Insensitive Fiber & 7.5mm Min. Bend Radius
- Precision Zirconia Ferrule Connectors Ensure Low Loss
- LSZH Environmentally Friendly Jacket
- Optical Testing Ensures Network Performance
- Length – Customized

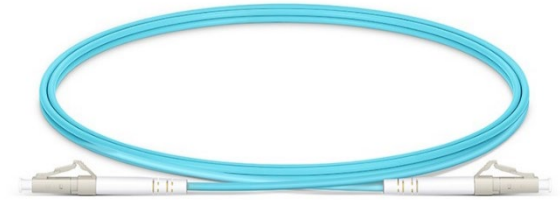

TECHNICAL SHEET

Connector A	LC/UPC	Connector B	LC/UPC
Fiber Mode	OM3 50/125μm	Fiber Count	Simplex
Fiber Grade	Bend Insensitive	Minimum Bend Radius	7.5mm
Polish Type	UPC	Cable Diameter	2.0 mm
Cable Jacket	LSZH	Return Loss	≥ 30dB
Wavelength	850nm / 1300nm	Attenuation at 850nm	3.0 dB/km
Insertion Loss	≤ 0.3 dB	Attenuation at 1300nm	1.0 dB/km
Operating Temperature	-20~70°C	Storage Temperature	-40~80°C