


## Model No.: YRB-2CT

### Overview

YRB – Yixing Riser Box is able to hold to 2 adapters. It is used as a termination point for the drop cable to connect with patch cable in FTTH indoor application. It integrates fiber splicing, termination, storage and cable connection in one solid protection box.

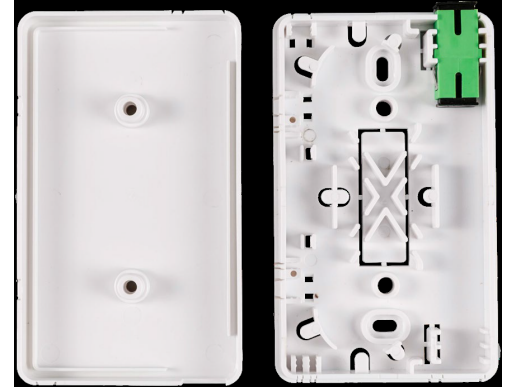

### SPECIFICATIONS

Item	Parameters
Dimensions (mm)	117x70x18
Material	Plastic
Splice capacity	2 fusion or 2 mechanical splices
Fiber type	SM&MM
Fiber optic adaptor	1 or 2 SC Adapters
Phone connector type	Keystone RJ45, RJ11, RG6, UTP
Operating temperature	-10 ~ 65 C