

QSFP 40G 850nm 300m eSR4 MPO Transceiver

TQ8541A-CN Product Specification

FEATURES

- Typical data rate 10.3125Gbps per channel
- High Reliability 850nm VCSEL technology
- MPO connector receptacle
- Single +3.3V power supply
- Hot-pluggable
- International Class1 laser safety certified
- Operating temperature range: 0 ~ +70°C
- RoHS Compliant
- Support Digital Diagnostic Monitoring interface
- Max reach 300m on 50/125µm MMF

APPLICATIONS

- 40GB Ethernet links
- Infiniband QDR, DDR and SDR
- 40G Telecom connections

ORDERING INFORMATION

| Part Number | Form Factor | Data Rate (Gbps) | Media | Distance (km) | Wavelength (nm) | Temperature (°C) |
|-------------|-------------|------------------|-------|---------------|-----------------|------------------|
| TQ8541A-CN | QSFP+ | 41.25 | SMF | 0.3 | 850 | 0~70 |

ABSOLUTE MAXIMUM RATINGS

Exceeding the limits below may damage the transceiver permanently.

| Parameter | Symbol | Min | Typ | Max | Unit. | Note |
|-----------------------------|--------|------|-----|-----|-------|------|
| Storage Temperature | TSTG | -40 | - | 85 | °C | |
| Operating Relative Humidity | RH | 5 | - | 95 | % | |
| Supply Voltage | VCC | -0.3 | - | 3.6 | V | |

RECOMMENDED OPERATING CONDITIONS

| Parameter | Symbol | Min | Typ | Max | Unit. | Note |
|----------------------------|--------|------|---------|------|-------|--------------|
| Operating Case Temperature | Tc | 0 | - | 70 | °C | |
| Supply Voltage | VCC3 | 3.13 | 3.3 | 3.47 | V | |
| Supply Current | ICC3 | - | - | 450 | mA | +3.3V Supply |
| Data Rate | DR | - | 10.3125 | - | Gbps | |

ELECTRICAL and OPTICAL CHARACTERISTICS

| Parameter | Symbol | Min | Typ | Max | Unit. | Note |
|------------------------------------|------------------|---------|-----|-------|-------|--------|
| Transmitter | | | | | | |
| Tx Differential Input Amplitude | Vin p-p | 300 | - | 1100 | mV | |
| Input Differential Impedance | Zin | 90 | 100 | 110 | Ω | |
| Average Launch Power, each lane | PO | -7.5 | - | 1 | dBm | |
| Extinction Ratio | ER | 3 | - | - | dB | |
| Transmitter and Dispersion Penalty | TDP | - | - | 3.5 | dB | |
| Center Wavelength Range | λ_c | 840 | 850 | 860 | nm | |
| Spectrum Width | $\Delta \lambda$ | - | - | 3.5 | nm | |
| Tx Disable Voltage | VOH | VCC-0.5 | - | VCC | V | LVTTTL |
| | VOL | 0 | - | 0.4 | V | LVTTTL |
| Optical Power at Tx Disable | Ptxdis | - | - | -30 | dBm | |
| Receiver | | | | | | |
| Rx Differential Output Amplitude | Vout p-p | 500 | - | 800 | mV | |
| Receiver Optical Wavelength | λ_c | 840 | 850 | 860 | nm | |
| Receiver Sensitivity, each lane | Sen | - | - | -11.1 | dBm | Note 1 |
| Receiver Overload | OL | 2.4 | - | - | dBm | |
| LOS Voltage | Normal | 2 | - | Vcc | V | LVTTTL |
| | Fault | 0 | - | 0.8 | V | LVTTTL |

| Parameter | Symbol | Min | Typ | Max | Unit. | Note |
|---------------------|--------|-----|-----|-----|-------|------|
| LOS Assert Level | LOSA | -30 | - | - | dBm | |
| LOS De-Assert Level | LOSD | - | - | -13 | dBm | |
| LOS Hysteresis | LOSH | 0.5 | | 6 | dB | |


Notes:

1. Measured with 2³¹-1 NRZ Pattern. BER≤1E-12@10Gpbs, ER=3dB

Digital Diagnostic Functions

| Parameter | Symbol | Min. | Max. | Unit | Notes |
|------------------|------------|------|------|------|--------------|
| Temperature | DDMI_Temp | -3 | 3 | °C | 1LSB=1/256°C |
| Supply Voltage | DDMI_Vcc | -3% | 3% | v | 1LSB=0.1mV |
| Bias Current | DDMI_Ibias | -10% | 10% | mA | 1LSB=2uA |
| TX Optical Power | DDMI_TX | -3 | +3 | dB | 1LSB=0.1uW |
| RX Optical Power | DDMI_RX | -3 | +3 | dB | 1LSB=0.1uW |

PIN DIAGRAM

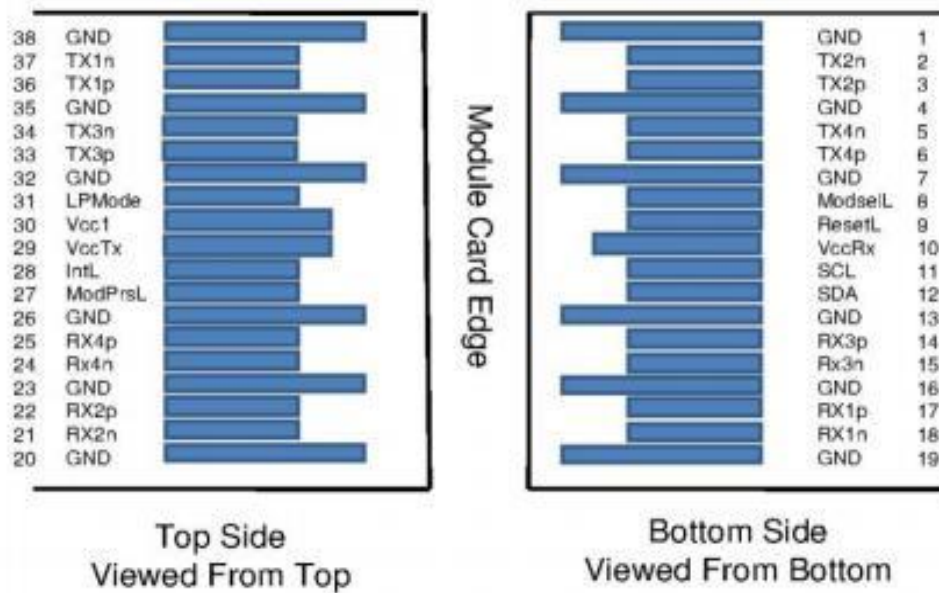

PIN DESCRIPTIONS

| Pin | Symbol | Description | Notes |
|-----|---------|--|-------|
| 1 | GND | Transmitter Ground (Common with Receiver Ground) | 1 |
| 2 | TX2N | Transmitter Inverted Data Input | |
| 3 | TX2P | Transmitter Non-Inverted Data Input | |
| 4 | GND | Ground | 1 |
| 5 | TX4N | Transmitter Inverted Data Input | |
| 6 | TX4P | Transmitter Non-Inverted Data Input | |
| 7 | GND | Ground | 1 |
| 8 | ModSelL | Module Select | |
| 9 | ResetL | Module Reset | |
| 10 | Vcc Rx | +3.3 V Power supply receiver | 2 |
| 11 | SCL | 2-wire serial interface clock | |
| 12 | SDA | 2-wire serial interface data | |
| 13 | GND | Ground | |
| 14 | RX3P | Receiver Non-Inverted Data Output | |
| 15 | RX3N | Receiver Inverted Data Output | |
| 16 | GND | Ground | 1 |
| 17 | RX1P | Receiver Non-Inverted Data Output | |
| 18 | RX1N | Receiver Inverted Data Output | |
| 19 | GND | Ground | 1 |

| | | | |
|----|---------|-------------------------------------|---|
| 20 | GND | Ground | 1 |
| 21 | RX2N | Receiver Inverted Data Output | |
| 22 | RX2P | Receiver Non-Inverted Data Output | |
| 23 | GND | Ground | 1 |
| 24 | RX4N | Receiver Inverted Data Output | 1 |
| 25 | RX4P | Receiver Non-Inverted Data Output | |
| 26 | GND | Ground | 1 |
| 27 | ModPrsL | Module Present | |
| 28 | IntL | Interrupt | |
| 29 | Vcc Tx | +3.3 V Power supply transmitter | 2 |
| 30 | Vcc1 | +3.3 V Power Supply | 2 |
| 31 | LPMODE | Low Power Mode | |
| 32 | GND | Ground | 1 |
| 33 | TX3P | Transmitter Non-Inverted Data Input | |
| 34 | TX3N | Transmitter Inverted Data input | |
| 35 | GND | Ground | 1 |
| 36 | TX1P | Transmitter Non-Inverted Data Input | |
| 37 | TX1N | Transmitter Inverted Data input | |
| 38 | GND | Ground | 1 |

Notes:

1. All Ground (GND) are common within the QSFP+ module and all module voltages are referenced to this potential unless noted otherwise. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1 and VccTx are the receiving and transmission power suppliers and shall be applied concurrently. The connector pins are each rated for a maximum current of 500mA.

