


## FO passive components

### Optowire SC/UPC Pigtail, G657A2, Singlemode, LSZH

- LSZH Flame-retardant Fiber Optic Cable with Tight-buffered Coating on Each Optical Fiber.
- G.657.A2 Bend Insensitive Fiber & 10mm Min. Bend Radius.
- Optical Testing Guarantees Insertion Loss and Returns Loss.
- Support Both Fusion and Mechanical Splicing for Fiber Cabling Systems Returns Loss.

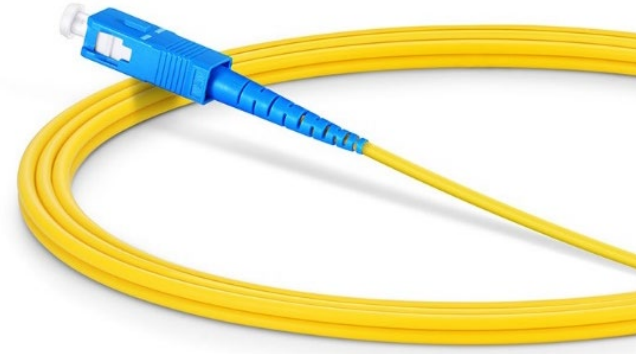

## TECHNICAL SHEET

<b>Connector A</b>	<b>SC</b>	<b>Connector B</b>	<b>Unterminated</b>
<b>Fiber Mode</b>	<b>9/125 μm</b>	<b>Fiber Count</b>	<b>Simplex</b>
<b>Fiber Grade</b>	<b>G.657A2</b>	<b>Minimum Bend Radius</b>	<b>10 mm</b>
<b>Polish Type</b>	<b>UPC</b>	<b>Cable Diameter</b>	<b>0.9 mm</b>
<b>Cable Jacket</b>	<b>LSZH</b>	<b>Jacket Color</b>	<b>Yellow</b>
<b>Wavelength</b>	<b>1310 nm/1550 nm</b>	<b>Durability</b>	<b>500 Times</b>
<b>Insertion Loss</b>	<b>≤0.3 dB</b>	<b>Interchangeability</b>	<b>≤0.2 dB</b>
<b>Return Loss</b>	<b>≥50 dB</b>	<b>Vibration</b>	<b>≤0.2 dB</b>
<b>Operating Temperature</b>	<b>-40~75°C</b>	<b>Storage Temperature</b>	<b>-45~85°C</b>