

**Model: YTDB-08I-4****Overview**

Model YTDB-08I-1 can connect the drop cable with feeder cable as the termination point in the FTTX network, which is cable to meet at least 8 users' requirements. It can help splicing, splitting, storage and management with suitable space.


**Features**

- The body is made of high-quality engineering plastic with good strength
- With safe special-shaped lock, the box can be opened easily and has good water-proof performance, suitable for indoor and outdoor natural environments
- With double-page design, the box can be installed and maintained easily, the fusion and termination are completely separated
- The drop leaf can be installed 1 pcs of 1\*8 Tube Type Splitter

**Technical index**

<b>Model No.</b>	YTDB-08I-4	<b>Color</b>	Black
<b>Capacity</b>	24 (2pcs splicing tray 12F)	<b>Material</b>	PC+ABS, ABS
<b>Dimension(L*W*DMM)</b>	244*195*55	<b>Inlet/Outlet</b>	3/8
<b>Inlet Cable Port</b>	3pcs $\phi$ 8-12 With 3pcs waterproof plug	<b>Outlet Cable Port</b>	8 pcs 2*3 drop cable
<b>Protection Level</b>	IP55	<b>Installation mode</b>	Wall and pole mounted

The dimension diagram:(mm)

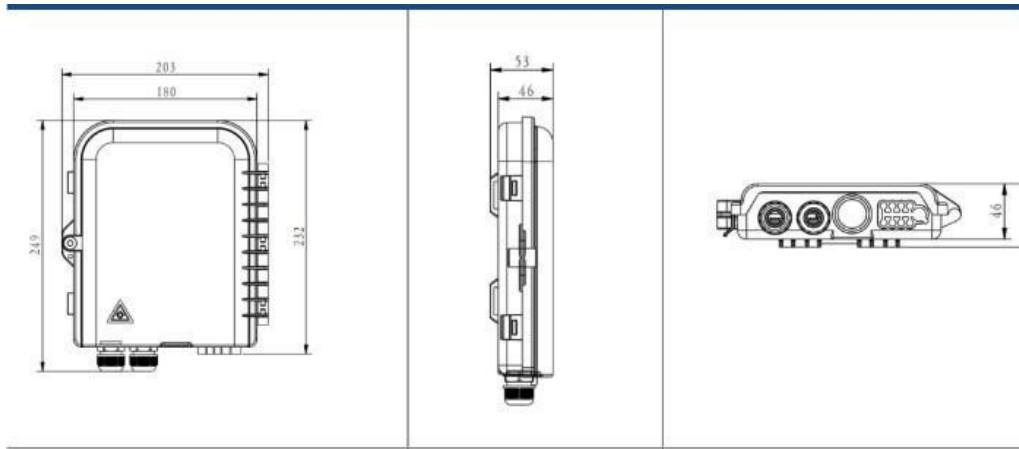

Pictures for reference:





Package Information:

- Plastic bag size: 320\*270mm
- Inner box with single corrugated size: 250\*210\*65mm
- Carton with double corrugated size: 525\*445\*370mm(20PCS/Box)
- Weight per carton: 15KG